DX340|HD

IN THE PRESS BOX


Setup

- 1 Screw ANTENNAS to connectors at 90° angle.
- 2 Connect POWER ADAPTER and tighten nut securely to base station.



3 IMPORTANT!

Locate the BASE STATION so there are no physical obstructions to your sideline communicators.




- **4** Press the power button to POWER ON.
- 5 Insert the HEADSET plug all the way into connector



6 For multiple base stations, connect with provided network cable



TALK button (Push ON / Push OFF)

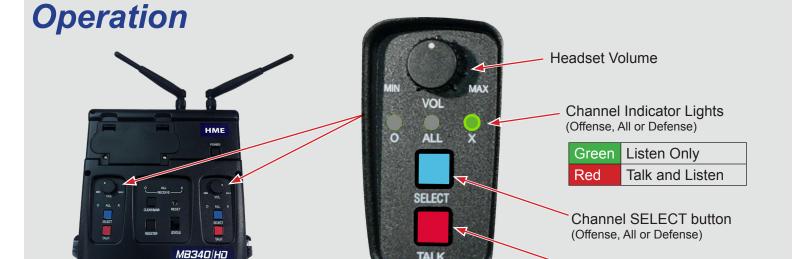



HM ELECTRONICS, INC.

2848 Whiptail Loop, Carlsbad, CA 92010 USA Phone: 1-800-848-4468 Fax: 858-552-0172 Website: www.hme.com Email: support@hme.com

DX340|HD


ON THE FIELD

Beltpac & Headset



- 1 Insert headset plug all the way into connector
- 2 Press and release PWR (power) button
- 3 Put headset on and adjust volume
- **4** Clip beltpac on your belt

Operation



Use the controls on the beltpac as follows:

0	Speak to Offensive Coaches
&	Speak to Defensive Coaches
E E	Speak to All Coaches

Changing the Battery

If you hear "Change battery":

- Remove the beltpac from its pouch.
- Slide battery release latch in direction of arrow, then lift the battery out of the beltpac.
- Place the battery in battery-charger port for recharging.
- Install a fully charged battery in beltpac.
- Put the beltpac back into its pouch.



Charging the Battery

- Place a battery in one of the four charging ports on the AC40 battery charger
- The battery status lights indicate the charging status
- Install fully charged batteries in headsets or store them in the storage ports
- Battery charging time is approximately 2.5 hours

