

NEXEO® TELEPHONE INTERFACE OPERATION:

To set your headset to answer phone calls:

1. Pair your headset (and select a name if prompted or continue as a guest).
2. When the **Select Your Position** dialog appears, select a position and check the box labeled: **Allow this headset to receive telephone calls**. See Fig. 1. (Since only one headset can be designated to receive phone calls, checking the box forces any previous headset assigned out of this mode.) **Note:** To use this feature, the Telephone Interface must also be turned ON. Select from the drop-down list under **SYSTEM>SETTINGS** on the Base Station (see Fig. 2).
3. The headset **(Action)** key is used to answer phone calls. Incoming calls will ring on the headset, and the TI7000 status light will slowly alternate between red and green.
 - **To answer a call:** tap the **(Action)** key once (the TI7000 status light turns a steady green). The headset status LED turns a steady blue while the mic boom flashes blue.
 - **To end a call:** tap the **(Action)** key again (the TI7000 status light reverts to a steady red).
 - **To place a call on hold and speak to a lane:**
 - i. Tap the corresponding 1 or 2 key **once** to place the call on hold. This returns the headset to idle mode.
 - ii. Tap the corresponding 1 or 2 key again to speak to lane 1 or 2, respectively.
 - iii. To return to the call, tap the **(Action)** key.
 - iv. To end the call, tap **(Action)** again.

Note: The store telephone will continue to function normally when the Telephone Interface is enabled. However, if the store telephone is answered first before the designated headset user answers, the designated headset will not receive or hear the phone call, as it is disconnected and redirected to the telephone, and vice versa (i.e., only one receiver can answer a phone call, whoever answers first).

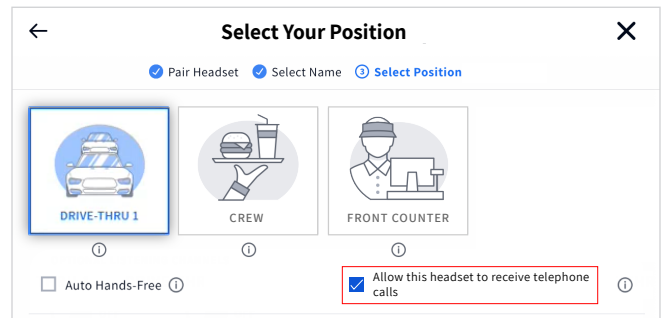


Fig. 1

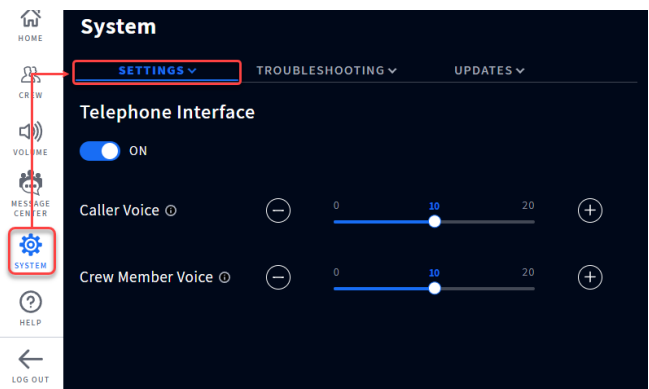


Fig. 2

